



# DSL-X30 SERIES

---

## LED FLASHING LAMP WITH CARBON ALLOY PLASTIC HOUSING




### PRODUCT BENEFITS

---


- Available in Blue, Red and Amber emitted light
- Designed with high level Electromagnetic Compatibility (EMC) specifications
- Carbon Alloy Plastic anticorrosion Housing
- Plastic housing design which extends product lifetime due to better heat dispersion
- Compact and lightweight design
- Asynchronous and Synchronous patterns
- Multivoltage 10-30V
- IP69K

## FUNCTIONS LAYOUT

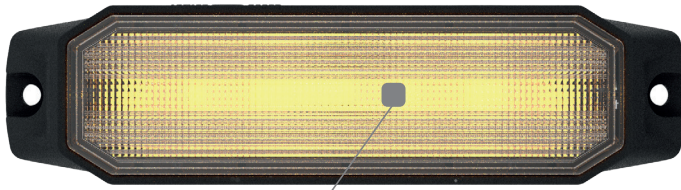

DSL-X30C1

Flashing Warning Light

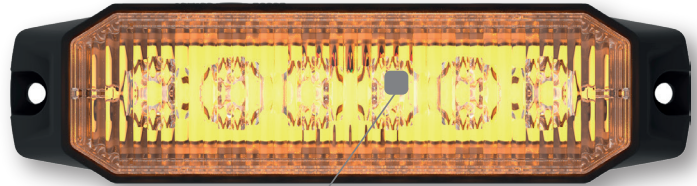

DSL-X30C2

Flashing Warning Light

## TECHNICAL SPECIFICATIONS

### TECHNICAL DATA

Product Number	DSL-X30C1			DSL-X30C2			
Operating Voltage	10 V - 30 V						
Reverse Polarity Protection	Yes						
Light Function	LED Warning Light						
Temperature Range	- 40°C to + 65°C						
Type of Mounting	Screw Mounting						
Material	Lens	PC					
	Housing	Plastic					
Type of Protection	IP69K						
Emitted Color	Amber	Red	Blue	Amber	Red	Blue	
Consumption	10W	3W	5W	14W	4W	7W	
	ECE	R65			R65	R65	R65
Approvals		XA1			XA2	XR1	XB1
	SAE	J595			J595		
	CISPR 25	Class 3	Class 3	Class 3	Class 3	Class 3	Class 3
Flashing Patterns	10	10	10	10	10	10	10
Type of Connection	300mm Cable						

### CODES OVERVIEW

Variants Ref. No.	Amber	Red	Blue
DSL-X30C1.05	•		
DSL-X30C1.06		•	
DSL-X30C1.08			•
DSL-X30C2.05	•		
DSL-X30C2.06		•	
DSL-X30C2.08			•

### DIMENSIONAL DRAWING

